


SPECIFICATIONS

CCB1400-WHT/WHT

Bottom Mount Merchandiser - 3 Door

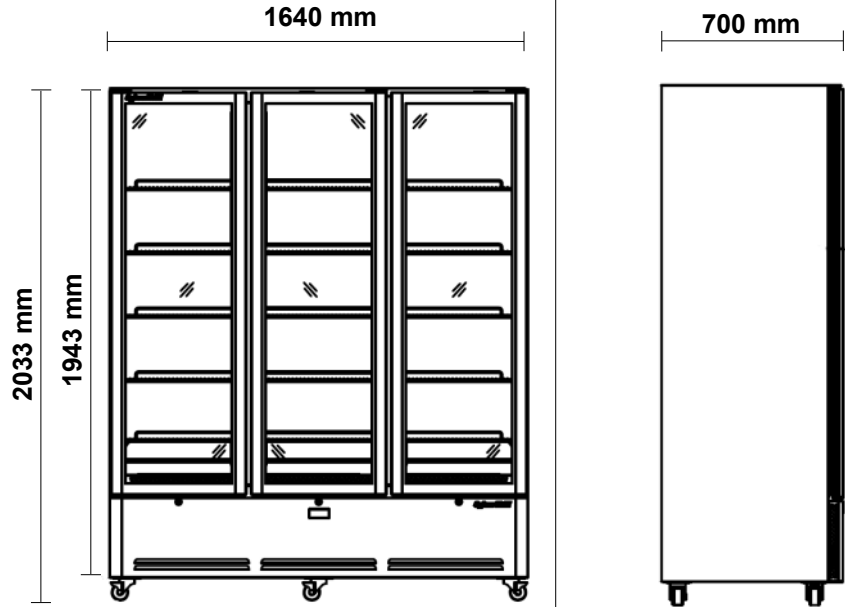

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, bottom mounted, refrigeration unit	
Refrigerant	R134a (other refrigerant options available)	
Cabinet Classes	3M1, 4M1, 5M1	
Energy consumption	5.48 kWh/24h	
Cabinet internal volume	1400 litres	
Insulation	50mm thick, high density, CFC, HCFC & HFC free Zero ODP injected PUR insulation	
Cabinet temperature range	+1°C to +4°C up to 43°C ambient	
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)	
Electrical	240 Volts a.c. 50 Hz	
Doors	3 x Self-closing, LowE, double glazed (safety glass) swing door	
Lighting	Full length internal LED light (automatic & with manual switch)	
Shelves	15 x PVC coated wire shelves (supplied with 3 x SS drip trays)	
Refrigeration	Removable 'CyberZone' refrigeration cassette	
Weight	280kg	
Lightbox	Optional replacement LED top-mounted lightbox (200mm)	
Cabinet dimensions	External	Internal
Width	1640mm	1540mm
Depth	1640mm	610mm
Height	1918mm*	1445mm

OPTIONS

- Lightbox (200mm)
- Solid Doors
- Legs (Std on castors)
- Extra Shelves
- SS exterior/interior
- Black exterior/interior
- Available in R290 Hydrocarbon refrigerant

* Height excludes castors or legs