
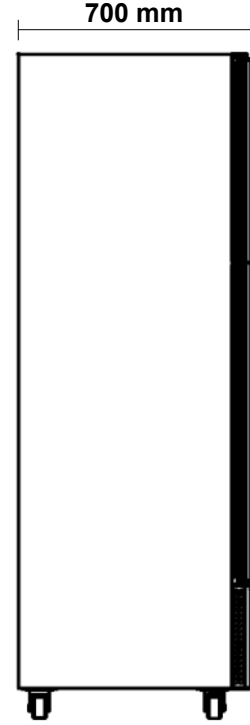


SPECIFICATIONS

CCB550-WHT/WHT

Bottom Mount Merchandiser - 1 Door

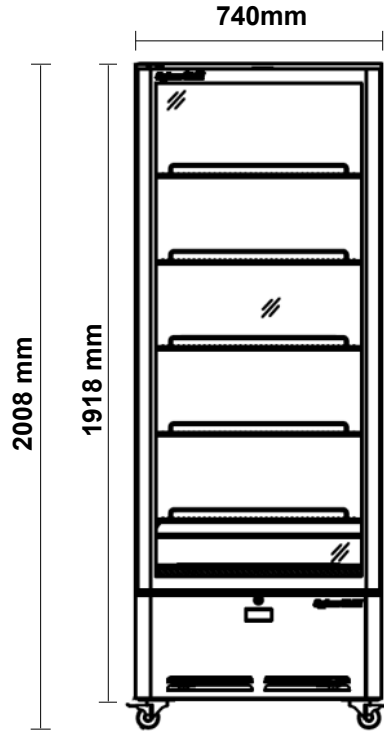

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, bottom mounted, refrigeration unit	
Refrigerant	R134a / 270g	
Cabinet Classes	3M1, 4M1, 5M1	
Nominal capacity	500 Watts @ -5°C SST	
Energy consumption	2.845 kWh/24h (Tested to ISO23953)	
Cabinet internal volume	550 litres	
Insulation	50mm thick, high density, CFC, HCFC & HFC free Zero ODP injected PUR insulation	
Cabinet temperature range	+1°C to +4°C up to 43°C ambient	
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)	
Electrical	240 Volts a.c. 50 Hz, 2.8 Amps	
Doors	1 x Self-closing, LowE, double glazed (safety glass) swing door	
Lighting	Full length internal LED light (automatic & with manual switch)	
Shelves	5 x PVC coated wire shelves (supplied with 1 x SS drip trays)	
Refrigeration	Removable 'CyberZone' refrigeration cassette	
Weight	155kg	
Lightbox	Optional replacement LED top-mounted lightbox (200mm)	
Cabinet dimensions	External	Internal
Width	740mm	640mm
Depth	700mm	610mm
Height	1918mm*	1445mm

OPTIONS

- Lightbox (200mm)
- Solid Doors
- Legs (Std on castors)
- Extra Shelves
- SS exterior/interior
- Black exterior/interior
- Available in R290 Hydrocarbon refrigerant

* Height excludes castors or legs