
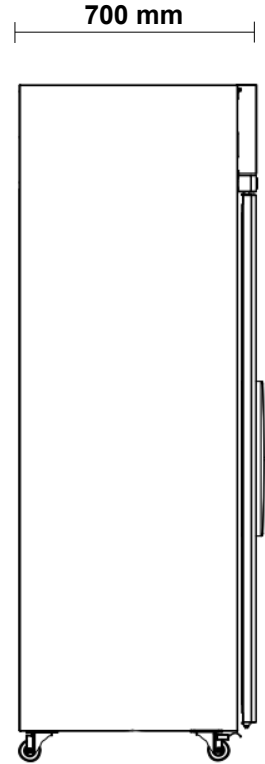


# SPECIFICATIONS

## CCT550-WHT/WHT

### Top Mount 1-Door Chiller

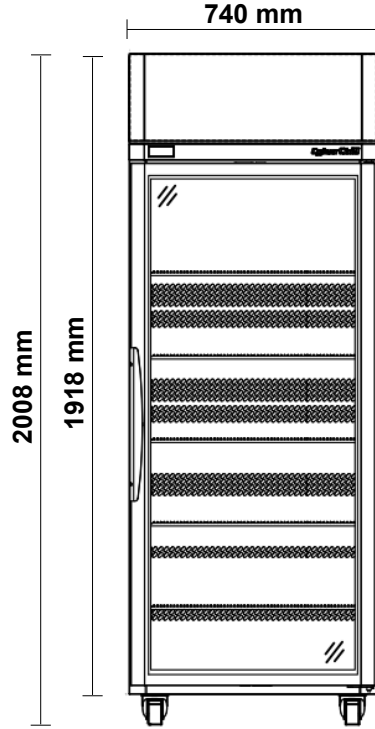

#### SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, top mounted, refrigeration unit		
Refrigerant	R134a / 270g		
Cabinet Classes	3M1, 4M1, 5M1		
Nominal capacity	500 Watts @ -5°C SST		
Energy consumption	2.845 kWh/24h (Tested to ISO23953)		
Cabinet internal volume	550 litres		
Insulation	50mm thick, high density, CFC, HCFC & HFC free Zero ODP injected PUR insulation		
Cabinet temperature range	+1°C to +4°C up to 43°C ambient		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Electrical	240 Volts a.c. 50 Hz, 2.8 Amps		
Doors	1 x Self-closing, LowE, double glazed (safety glass) swing door		
Lighting	Full length internal LED light (automatic & with manual switch)		
Shelves	5 x PVC coated wire shelves (supplied with 1 x SS drip trays)		
Refrigeration	Removable 'CyberZone' refrigeration cassette		
Weight	155kg		
Lightbox	Optional replacement LED top-mounted lightbox (400mm)		
Cabinet dimensions	<b>External</b>	<b>Internal</b>	
	Width	740mm	640mm
	Depth	700mm	610mm
Height	1918mm*		
Height	1918mm*	1445mm	

#### OPTIONS

- Lightbox
- Solid Doors
- Extra Shelves
- SS exterior/interior
- Black exterior/interior
- Available in R290 Hydrocarbon refrigerant

\* Height excludes castors or legs