
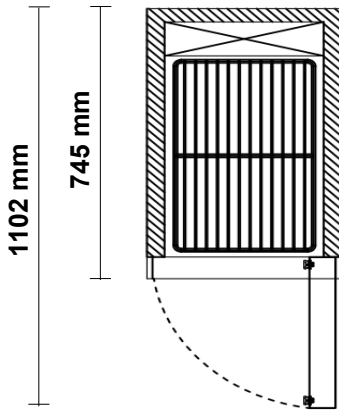
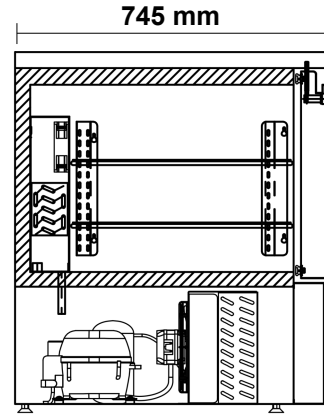


SPECIFICATIONS

HSS150-D

1-door Space Saving Solutions Chiller

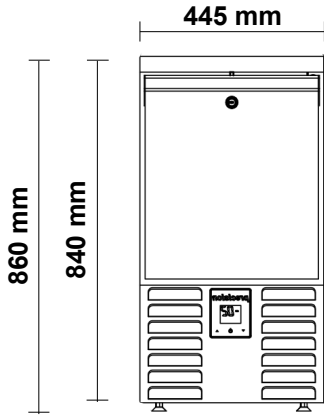

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, bottom mounted, refrigeration unit		
Refrigerant	R134a / 160g		
Nominal capacity	412 Watts @ -5°C SST		
Cabinet internal volume	46 litres		
Insulation	40mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet temperature range	1°C to 4°C up to 43°C ambient		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Electrical	220-240 Volts a.c. 50 Hz, 1.5 Amps		
kWh/24hr	0.77		
Internal door opening size	1 door opening, accepts full 1/1 GN pans		
Doors	Solid stainless steel, self-closing door		
Worktop	Removeable stainless steel worktop		
Shelves	2 shelves & adjustable tray slides per door (325mm wide x 530mm deep)		
Weight	65kg		
Cabinet dimensions	External	Internal	
	Width	445mm	365mm
	Depth	745mm	630mm
	Height	840mm*	445mm

OPTIONS

• Bank of 2 Drawers
• Countertop Pan Well
• Insulated hinged lid for Countertop pan well
• No worktop
• Water-cooled
• Extra shelves
• Extra slides
• ST/ST back
• Castors / Legs
• Helicoil cable
• Hydrocarbon refrigerant
• HFO blast chiller

* Height excludes castors, legs or adjustable feet (includes SS worktop)