
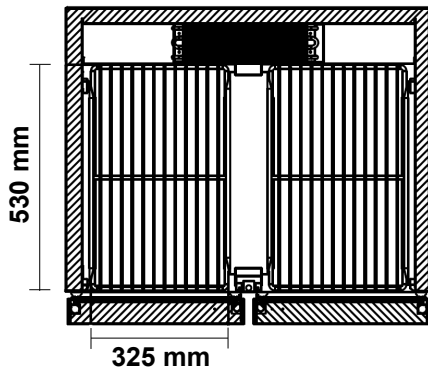
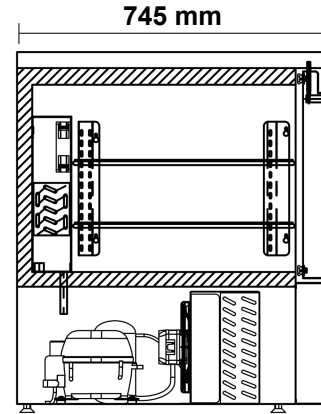


# SPECIFICATIONS

## HSS300-DD

### 2-door Space Saving Solutions Chiller

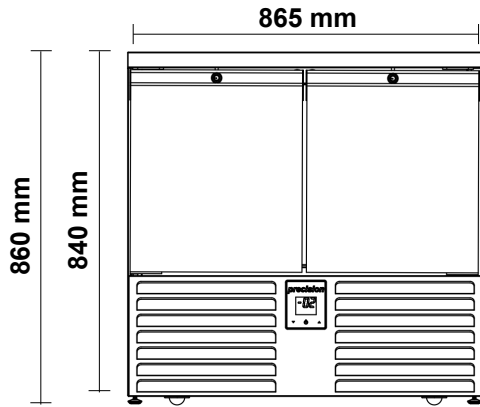

#### SPECIFICATIONS

<b>Refrigeration system</b>	Electronic controlled, self-contained, bottom mounted, refrigeration unit	
<b>Refrigerant</b>	R134a / 270g	
<b>Nominal capacity</b>	460 Watts @ -5°C SST	
<b>Cabinet internal volume</b>	98 litres	
<b>Insulation</b>	40mm thick, high density Zero ODP injected polyurethane insulation	
<b>Cabinet temperature range</b>	1°C to 4°C up to 43°C ambient	
<b>Drainage</b>	Waste heat vaporiser located in service compartment (no plumbing required)	
<b>Electrical</b>	220-240 Volts a.c. 50 Hz, 1.6 Amps	
<b>kWh/24hr</b>	1.3	
<b>Internal door opening size</b>	2 door opening, accepts full 1/1 GN pans	
<b>Doors</b>	Solid stainless steel, self-closing door	
<b>Worktop</b>	Removeable stainless steel worktop	
<b>Shelves</b>	2 shelves & adjustable tray slides per door (325mm wide x 530mm deep)	
<b>Weight</b>	80kg	
<b>Cabinet dimensions</b>	<b>External</b>	<b>Internal</b>
<b>Width</b>	865mm	795mm
<b>Depth</b>	745mm	630mm
<b>Height</b>	840mm*	445mm

#### OPTIONS

- Bank of 2 Drawers
- Countertop Pan Well
- Insulated hinged lid for Countertop pan well
- No worktop
- Water-cooled
- Extra shelves
- Extra slides
- ST/ST back
- Castors / Legs
- Helicoil cable
- Hydrocarbon refrigerant
- HFO blast chiller

\* Height excludes castors, legs or adjustable feet (includes SS worktop)