
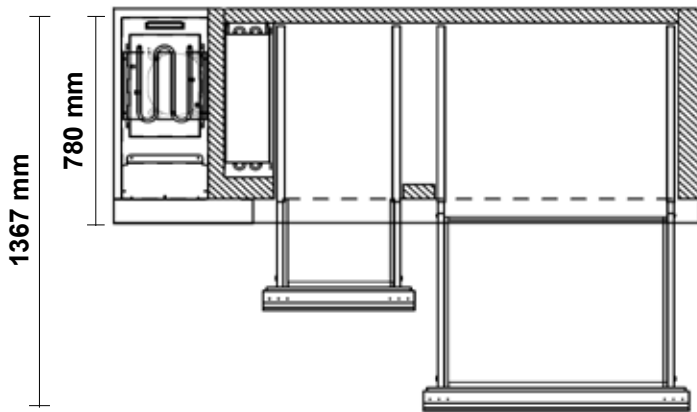



# SPECIFICATIONS

## HUBC412

### 4-Drawer Under Broiler Counter Chiller

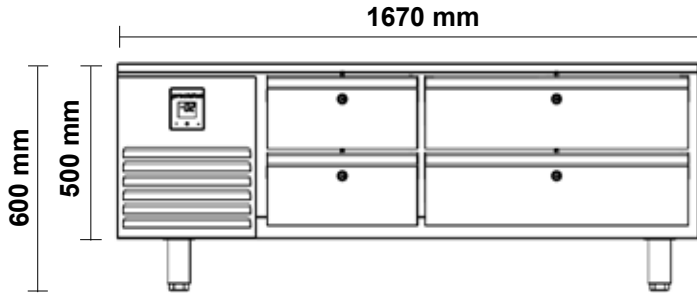

SPECIFICATIONS			
Refrigeration system	Electronic controlled, self-contained, side mounted, refrigeration unit		
Refrigerant	R134a / 160g		
Nominal capacity	460 Watts @ -10°C SST		
Cabinet internal volume	2 x GN 2/1 Drawers (650mm x 530mm) & 2 x GN 1/1 Drawers (325mm x 530mm)		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet temperature range	+1°C to +4°C up to 43°C ambient		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Electrical	220-240 Volts a.c. 50 Hz, 1.9 Amps		
kWh/24hr	3.48		
Doors	N/a		
Worktop	25mm Heat Resistant Stainless Steel Worktop		
Drawers	2 x GN 2/1 Drawers & 2 x GN 1/1 Drawers (Pan depth - 100mm)		
Weight	140 kg		
Cabinet dimensions	External	Internal	
	Width	1670mm	1280mm
	Depth	780mm	550mm
	Height	600mm	370mm

OPTIONS
Glass Doors
Banks of 1 Deep Drawers
Remote Units
Heli-coil Cable
Splashbacks
Extended Worktops
No Worktop
Optional Pans
Water-cooled
ST/ST Back

\* Height excludes castors, legs or SS worktop