


SPECIFICATIONS LCR221-RDD



790 Series 2-Door Remote Counter Freezer

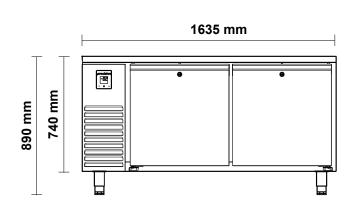







SPECIFICATIONS			
Refrigeration system	Electronic controlled, self-contained, side mounted, refrigeration unit		
Refrigerant	R404a		
Nominal capacity	480 Watts @ -30°C SST		
Cabinet internal volume	460 litres		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet temperature range	-18°C to -22°C up to 43°C ambient		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Electrical	220-240 Volts a.c. 50 Hz, 4.2 Amps		
kWh/24hr	n/a		
Internal door opening size	2 door openings, accepts full 2/1 GN pans (650mm wide x 530mm deep)		
Doors	Stainless steel, self-closing, lockable solid doors		
Worksop	Removeable stainless steel worktop		
Shelves	2 shelves & adjustable tray slides per door (Total 4)		
Weight	125kg		
Cabinet dimensions	External	Internal	
Width	1635mm	1235mm	
Depth	790mm	670mm	
Height	700mm*	600mm	

OP	TIONS
•	Glass Doors
•	Bank of 2 Drawers
•	Bank of 3 Drawers
•	Integral Units
•	Castors/Adjustable Feet (Standard on 150mm legs)
•	Splashbacks
•	Extended Worktops
•	No Worktop
•	Different Heights
•	Raised Pan Grid
•	Countertop Well
•	Over-shelf / Gantry
•	Water-cooled
•	Extra Shelves
•	Extra Slides
•	ST/ST Back
•	Heli-coil Cable
•	Hydrocarbon Refrigerant
•	HFO Refrigerant

^{*} Height excludes castors, legs or SS worktop