
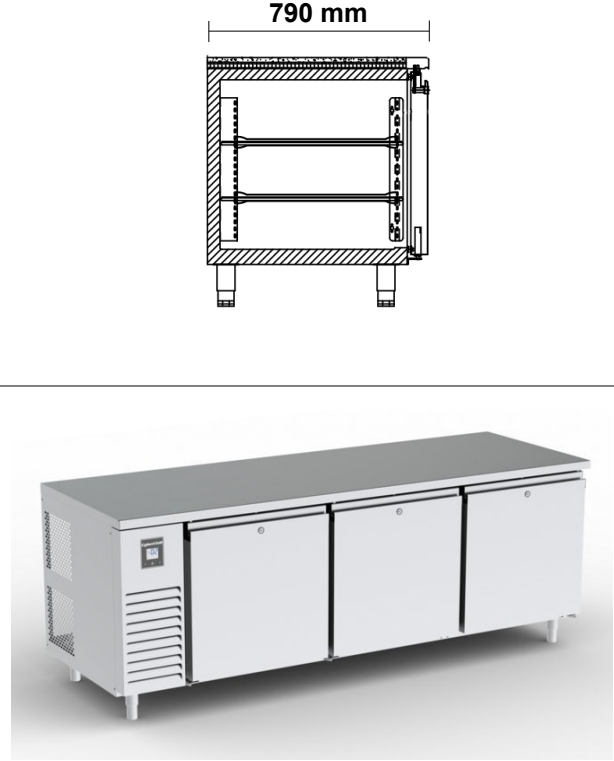


SPECIFICATIONS

LCR321-RDDD

790 Series 3-Door Remote Counter Freezer

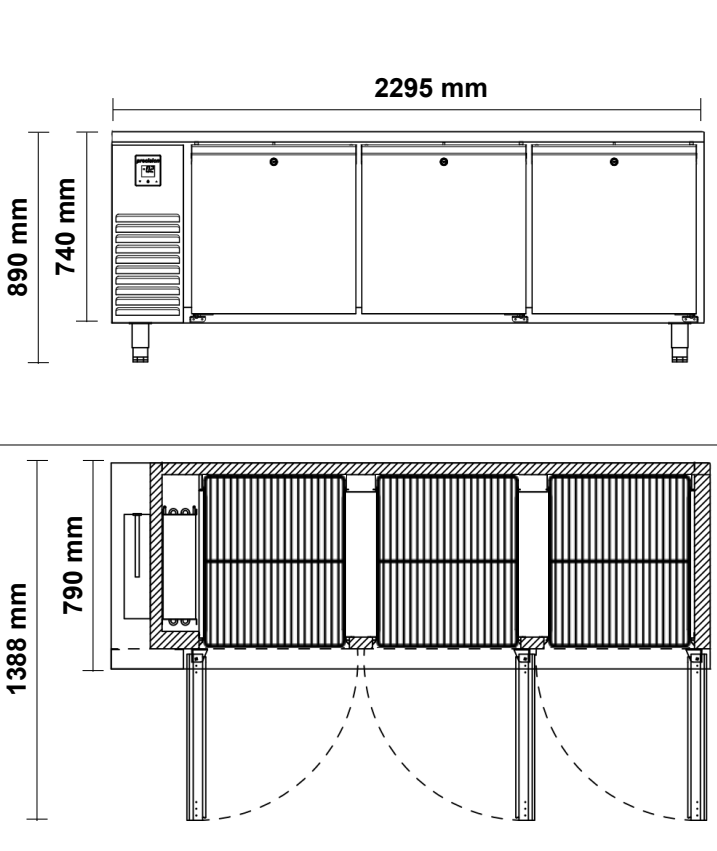

SPECIFICATIONS			
Refrigeration system	Electronic controlled, self-contained, side mounted, refrigeration unit		
Refrigerant	R404a		
Nominal capacity	480 Watts @ -30°C SST		
Cabinet internal volume	708 litres		
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation		
Cabinet temperature range	-18°C to -22°C up to 43°C ambient		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Electrical	220-240 Volts a.c. 50 Hz, 4.2 Amps		
kWh/24hr	n/a		
Internal door opening size	3 door openings, accepts full 2/1 GN pans (650mm wide x 530mm deep)		
Doors	Stainless steel, self-closing, lockable solid doors		
Worktop	Removeable stainless steel worktop		
Shelves	2 shelves & adjustable tray slides per door (Total 6)		
Weight	185kg		
Cabinet dimensions	External	Internal	
	Width	2295mm	1895mm
	Depth	790mm	670mm
	Height	700mm*	600mm

OPTIONS
• Glass Doors
• Bank of 2 Drawers
• Bank of 3 Drawers
• Integral Units
• Castors/Adjustable Feet (Standard on 150mm legs)
• Splashbacks
• Extended Worktops
• No Worktop
• Different Heights
• Raised Pan Grid
• Countertop Well
• Over-shelf / Gantry
• Water-cooled
• Extra Shelves
• Extra Slides
• ST/ST Back
• Heli-coil Cable
• Hydrocarbon Refrigerant
• HFO Refrigerant

* Height excludes castors, legs or SS worktop