
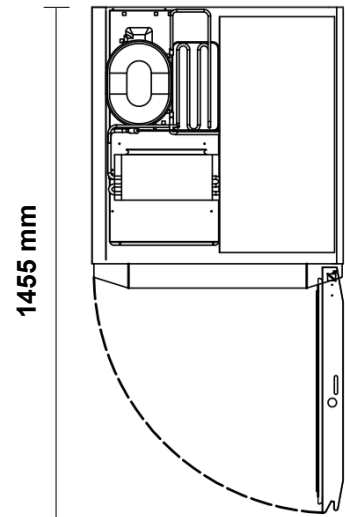
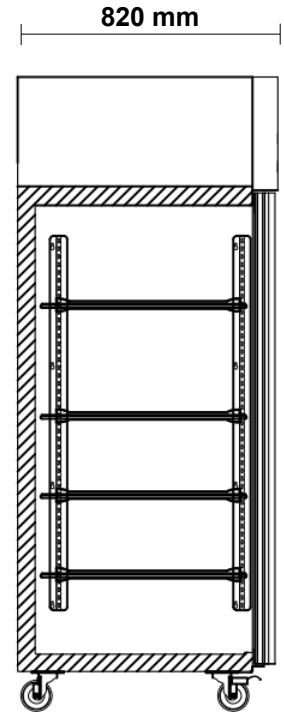


# SPECIFICATIONS

## LPT601

### Top Mount Cabinet Freezer

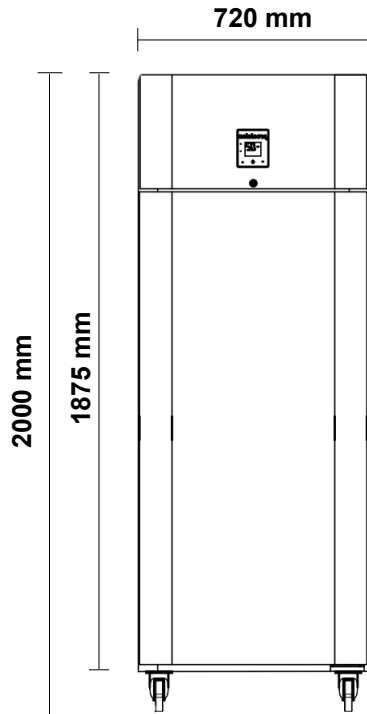

#### SPECIFICATIONS

<b>Refrigeration system</b>	Electronic controlled, self-contained, top mounted, refrigeration unit	
<b>Refrigerant</b>	R404a / 260g (alternatively will supply in R290)	
<b>Nominal capacity</b>	480 Watts @ -30°C SST	
<b>Cabinet internal volume</b>	600 litres	
<b>Insulation</b>	60mm thick, high density, Zero ODP injected polyurethane insulation	
<b>Cabinet temperature range</b>	-18°C to -22°C up to 43°C ambient	
<b>Drainage</b>	Waste heat vaporiser located in service compartment (no plumbing required)	
<b>Electrical</b>	240 Volts a.c. 50 Hz, 3.5 Amps	
<b>kWh/24hr</b>	4.95	
<b>Internal door opening size</b>	1 door opening: Accepts full 1/1 & 1/2GN pans	
<b>Doors</b>	Stainless steel, self-closing, lockable solid door	
<b>Shelves</b>	4 shelves & adjustable tray slides per door (530mm wide x 650mm deep)	
<b>Weight</b>	146kg	
<b>Cabinet dimensions</b>	<b>External</b>	<b>Internal</b>
<b>Width</b>	720mm	600mm
<b>Depth</b>	820mm	685mm
<b>Height</b>	1875mm*	1405mm

\*Height excludes castors or legs

#### Ventilation Requirements:

Ensure adequate ventilation is provided above the cabinet. A minimum gap of at least 200mm must be left above the refrigeration unit and at least 30-50mm is recommended for the rear.

**Note:** Never store cardboard cartons or other items on top of the refrigeration unit as serious damage can occur.

#### OPTIONS

- Glass doors
- Half drawers
- Legs (Std on castors)
- Extra shelves
- Extra slides
- ST/ST back
- Helicoil Cable
- Hydrocarbon Refrigerant