


SPECIFICATIONS

LPU401

Bottom Mount Cabinet Freezer

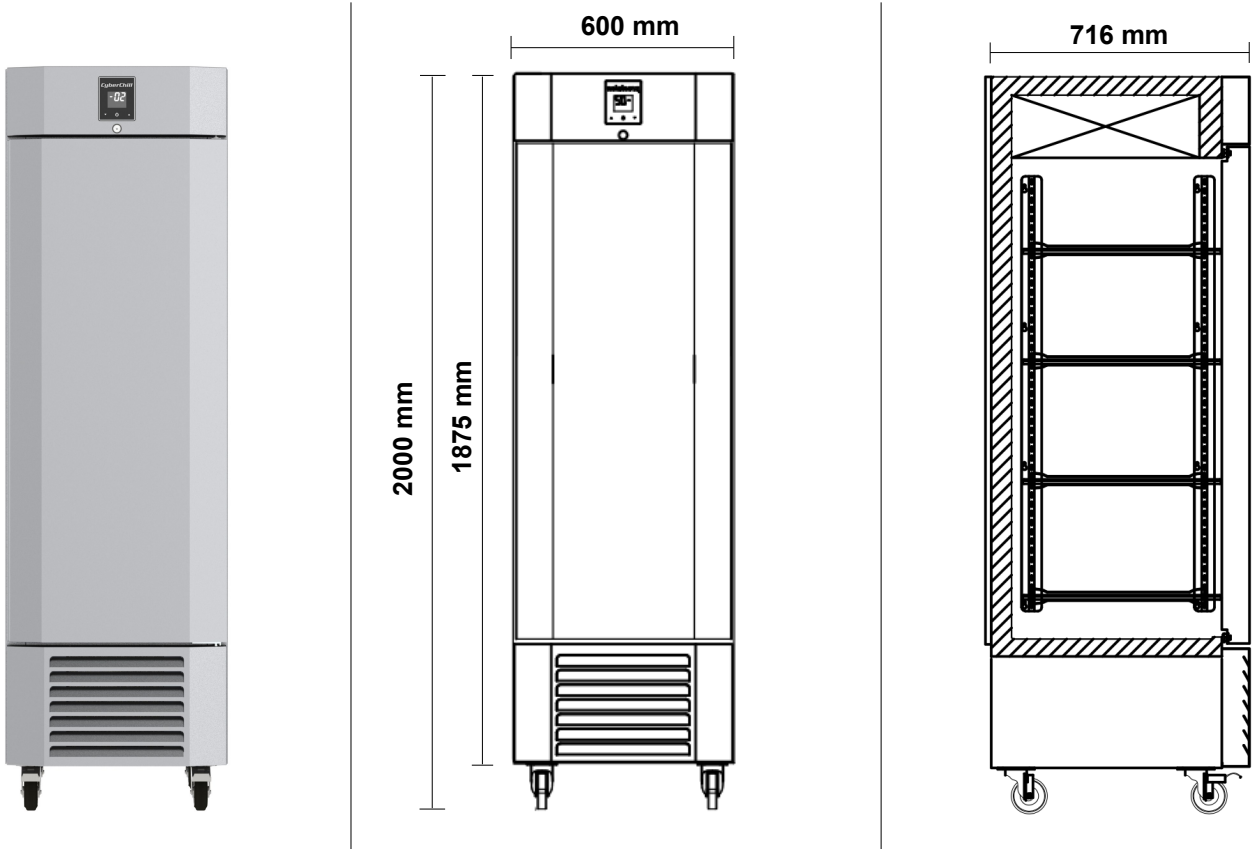

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, top mounted, refrigeration unit	
Refrigerant	R404a / 240g	
Nominal capacity	449 Watts @ -30°C SST	
Cabinet internal volume	400 litres	
Insulation	60mm thick, high density, Zero ODP injected polyurethane insulation	
Cabinet temperature range	-18°C to -22°C up to 43°C ambient	
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)	
Electrical	240 Volts a.c. 50 Hz, 3.6 Amps	
kWh/24hr	6.14	
Internal door opening size	1 door opening: Accepts full 1/1 GN pans	
Doors	Stainless steel, self-closing, lockable solid door (Reversible)	
Shelves	4 shelves & adjustable tray slides per door (325mm wide x 350mm deep)	
Weight	120kg	
Cabinet dimensions	External	Internal
Width	600mm	490mm
Depth	715mm	565mm
Height	1875mm*	1295mm

OPTIONS

- Glass doors
- Half drawers
- Legs (Standard on castors)
- Extra shelves
- Extra slides
- ST/ST back
- Heli-coil Cable
- Hydrocarbon Refrigerant

* Height excludes castors or legs