


SPECIFICATIONS

precision

refrigeration


LPU600

Bottom Mount Cabinets Freezer

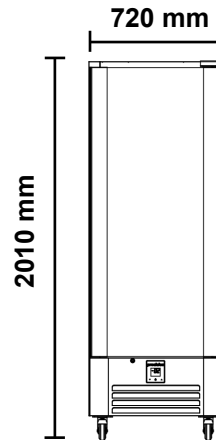

Options:

- Extra Shelves
- Half Doors
- ST/ST Back
- Legs
- Watercooled
- Hydrocarbon Refrigerant
- HFO Refrigerant

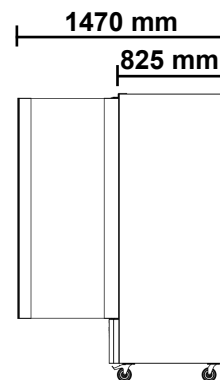

SPECIFICATIONS

Refrigeration system:	Electronic controlled, self-contained, bottom mounted, refrigeration unit
Refrigerant:	R404a / 240g
Nominal capacity:	480 Watts @ -30°C SST
Cabinet internal volume:	600 litres
Insulation:	60mm thick, high density 0 ODP injected polyurethane insulation
Cabinet temperature range:	-18°C to -22°C up to 43°C ambient
Drainage:	Waste Heat Vaporiser located in service comp. (no plumbing required)
Electrical:	220-240 Volts a.c. 50 Hz, 4.4 Amps
kWh/24 hr :	4.5
Internal door opening size:	1 door opening: Accepts full 1/1 & 2/1GN pans
Doors:	Stainless steel, self-closing, lockable solid door (Reversible)
Shelves:	4 shelves & adjustable tray slides per door (530mm wide x 650mm deep)
Weight:	136 kg

CABINET DIMENSIONS

	External	Internal
Width:	720mm	600mm
Depth:	825mm	675mm
Height:	1900mm*	1480mm
Floor area:	0.58m ²	

* Height excludes castors or legs

CyberChill