
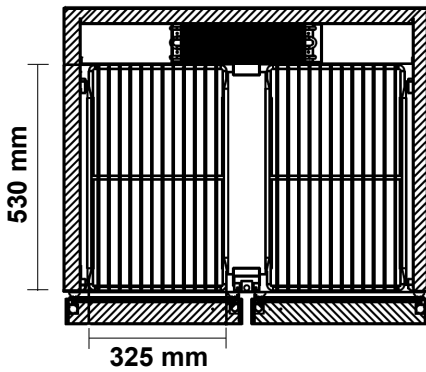
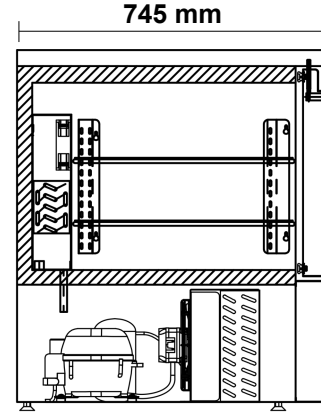


SPECIFICATIONS

LSS300-DD

2-door Space Saving Solutions Freezer

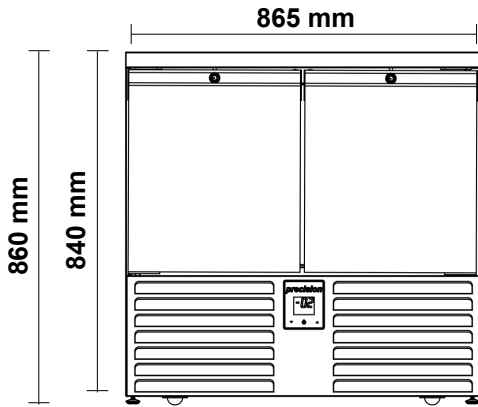

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, bottom mounted, refrigeration unit	
Refrigerant	R404a / 240g	
Nominal capacity	480 Watts @ -30°C SST	
Cabinet internal volume	98 litres	
Insulation	40mm thick, high density Zero ODP injected polyurethane insulation	
Cabinet temperature range	-18°C to -22°C up to 43°C ambient	
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)	
Electrical	220-240 Volts a.c. 50 Hz, 3.6 Amps	
kWh/24hr	7.4	
Internal door opening size	2 door opening, accepts full 1/1 GN pans	
Doors	Solid stainless steel, self-closing door	
Worktop	Removeable stainless steel worktop	
Shelves	2 shelves & adjustable tray slides per door (325mm wide x 530mm deep)	
Weight	85kg	
Cabinet dimensions	External	Internal
Width	865mm	795mm
Depth	745mm	630mm
Height	840mm*	445mm

OPTIONS

- Bank of 2 Drawers
- Countertop Pan Well
- Insulated hinged lid for Countertop pan well
- No worktop
- Water-cooled
- Extra shelves
- Extra slides
- ST/ST back
- Castors / Legs
- Helicoil cable
- Hydrocarbon refrigerant
- HFO blast chiller

* Height excludes castors, legs or adjustable feet (includes SS worktop)