
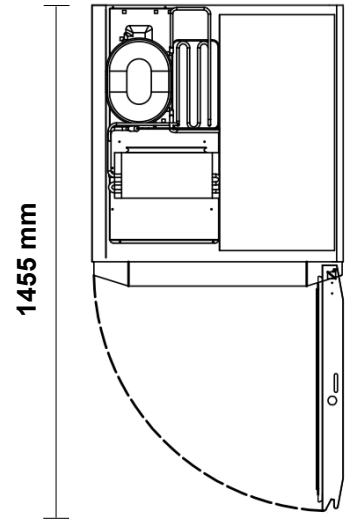
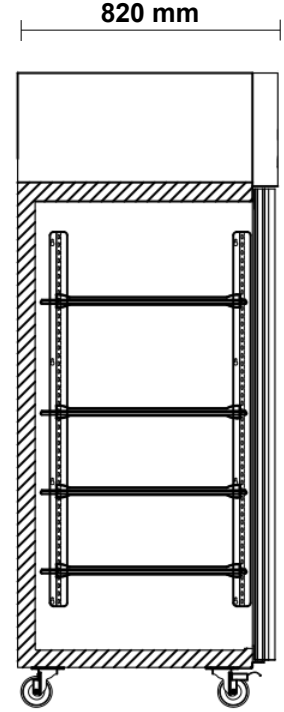


SPECIFICATIONS

MPT601

Top Mount Cabinet Chiller

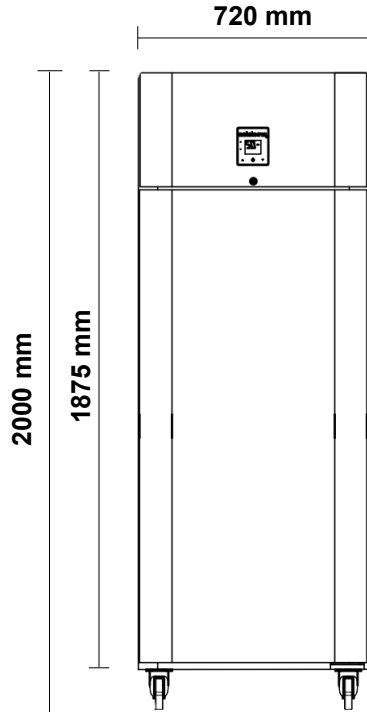

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, top mounted, refrigeration unit	
Refrigerant	R134a / 250g (alternatively will supply in R290)	
Nominal capacity	440 Watts @ -10°C SST	
Cabinet internal volume	600 litres	
Insulation	60mm thick, high density, Zero ODP injected polyurethane insulation	
Cabinet temperature range	-2°C to +4°C up to 43°C ambient	
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)	
Electrical	240 Volts a.c. 50 Hz, 1.7 Amps	
kWh/24hr	1.25	
Internal door opening size	1 door opening: Accepts full 1/1 & 1/2GN pans	
Doors	Stainless steel, self-closing, lockable solid door	
Shelves	4 shelves & adjustable tray slides per door (530mm wide x 650mm deep)	
Weight	138kg	
Cabinet dimensions	External	Internal
Width	720mm	600mm
Depth	820mm	685mm
Height	1875mm*	1405mm

*Height excludes castors or legs

Ventilation Requirements:

Ensure adequate ventilation is provided above the cabinet. A minimum gap of at least 200mm must be left above the refrigeration unit and at least 30-50mm is recommended for the rear.

Note: Never store cardboard cartons or other items on top of the refrigeration unit as serious damage can occur.

OPTIONS

- Glass doors
- Half drawers
- Legs (Std on castors)
- Extra shelves
- Extra slides
- ST/ST back
- Helicoil Cable
- Hydrocarbon refrigerant