
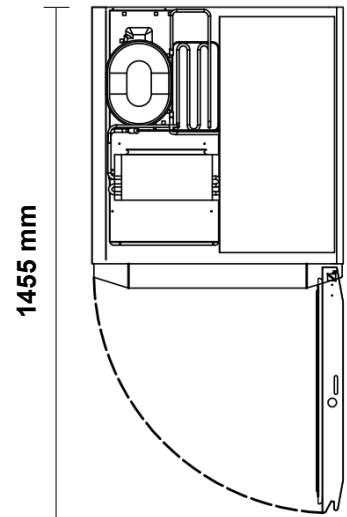
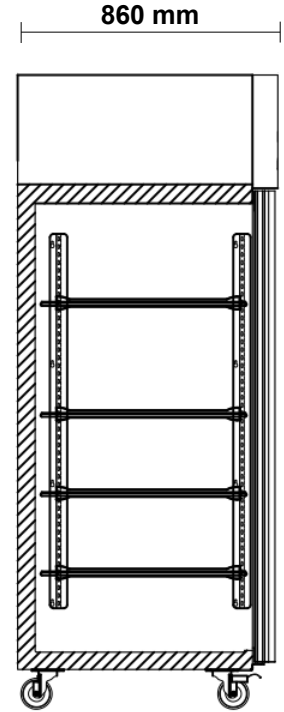


# SPECIFICATIONS

## MPT601

### Top Mount Cabinet Chiller

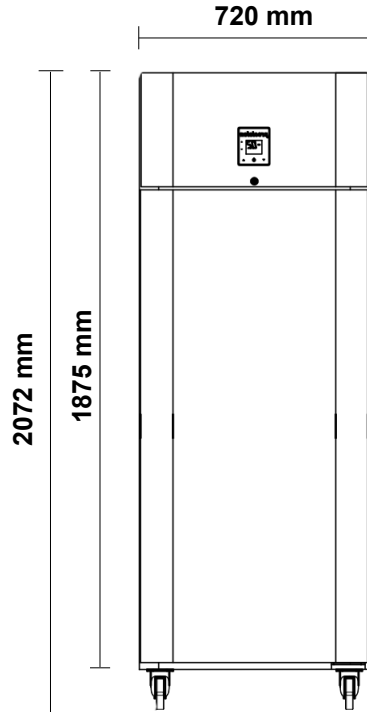

#### SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, top mounted, refrigeration unit		
Refrigerant	R134a / 250g		
Nominal capacity	440 Watts @ -10°C SST		
Cabinet internal volume	600 litres		
Insulation	60mm thick, high density, Zero ODP injected polyurethane insulation		
Cabinet temperature range	-2°C to +4°C up to 43°C ambient		
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)		
Electrical	240 Volts a.c. 50 Hz, 1.7 Amps		
kWh/24hr	1.25		
Internal door opening size	1 door opening: Accepts full 1/1 & 1/2GN pans		
Doors	Stainless steel, self-closing, lockable solid door		
Shelves	4 shelves & adjustable tray slides per door (530mm wide x 650mm deep)		
Weight	138kg		
Cabinet dimensions	External	Internal	
	Width	720mm	600mm
	Depth	860mm	685mm
	Height	2072mm	1405mm

#### OPTIONS

Glass doors
Half drawers
Legs (Std on castors)
Extra shelves
Extra slides
ST/ST back
Helicoil Cable
Hydrocarbon refrigerant