


SPECIFICATIONS

precision

refrigeration


MPT602

Top Mount Cabinets Chiller

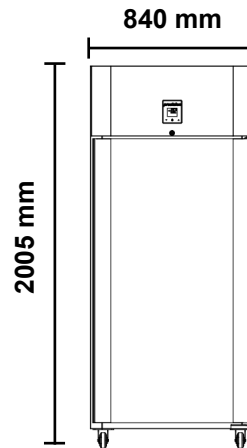

Options:

- Glass Doors
- Half Doors
- Legs
- Extra Shelves
- Extra Slides
- ST/ST Back
- Helicoil Cable
- Hydrocarbon Refrigerant

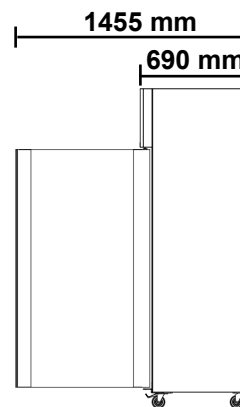

SPECIFICATIONS

Refrigeration system:	Electronic controlled, self-contained, top mounted, refrigeration unit
Refrigerant:	R134a / 270g
Nominal capacity:	440 Watts @ -10°C SST
Heat Rejection:	616 Watts
Cabinet internal volume:	600 litres
Insulation:	60mm thick, high density 0 ODP injected polyurethane insulation
Cabinet temperature range:	-2°C to +4°C up to 43°C ambient
Drainage:	Waste Heat Vaporiser located at the back of the cabinet (no plumbing required)
Electrical:	220-240 Volts a.c. 50 Hz, 2.2 Amps
kWh/24 hr :	1
Internal door opening size:	1 door opening: Accepts full 1/1 & 2/1GN pans
Doors:	Stainless steel, self-closing, lockable solid door
Shelves:	4 shelves & adjustable tray slides per door (530mm wide x 650mm deep)
Weight:	128 kg

CABINET DIMENSIONS

	External	Internal
Width:	840mm	720mm
Depth:	690mm	555mm
Height:	1875mm*	1410mm
Floor area:	0.58m ²	

* Height excludes castors or legs

CyberChill