


SPECIFICATIONS

MPU401

Bottom Mount Cabinet Chiller

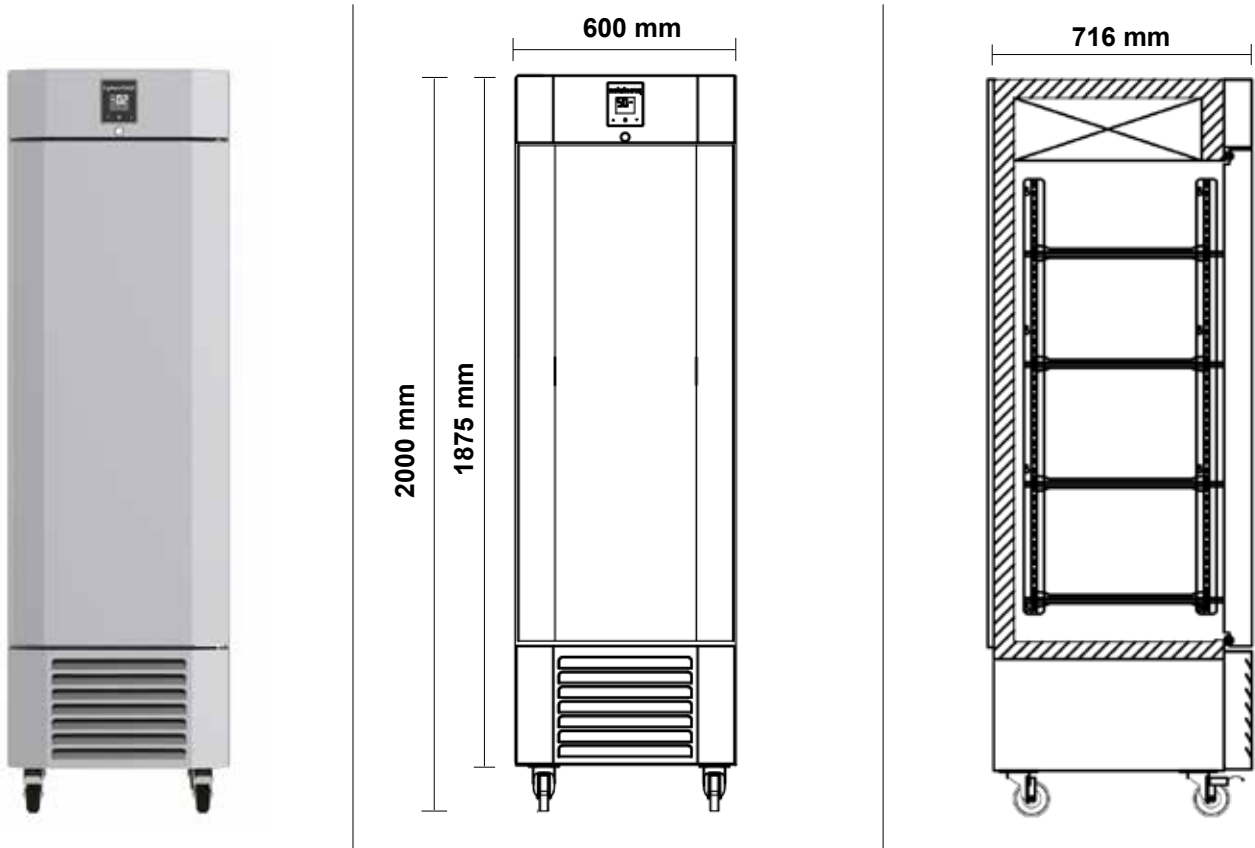

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, top mounted, refrigeration unit	
Refrigerant	R134a / 270g	
Nominal capacity	373 Watts @ -10°C SST	
Cabinet internal volume	400 litres	
Insulation	60mm thick, high density, Zero ODP injected polyurethane insulation	
Cabinet temperature range	-2°C to +4°C up to 43°C ambient	
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)	
Electrical	240 Volts a.c. 50 Hz, 1.8 Amps	
kWh/24hr	1.28	
Internal door opening size	1 door opening: Accepts full 1/1 GN pans	
Doors	Stainless steel, self-closing, lockable solid door (Reversible)	
Shelves	4 shelves & adjustable tray slides per door (325mm wide x 350mm deep)	
Weight	110kg	
Cabinet dimensions	External	Internal
Width	600mm	490mm
Depth	715mm	565mm
Height	1975mm	1295mm

OPTIONS

Glass doors
Half drawers
Legs (Standard on castors)
Extra shelves
Extra slides
ST/ST back
Heli-coil Cable
Hydrocarbon Refrigerant