


SPECIFICATIONS

PCF40

Blast Chiller / Freezer

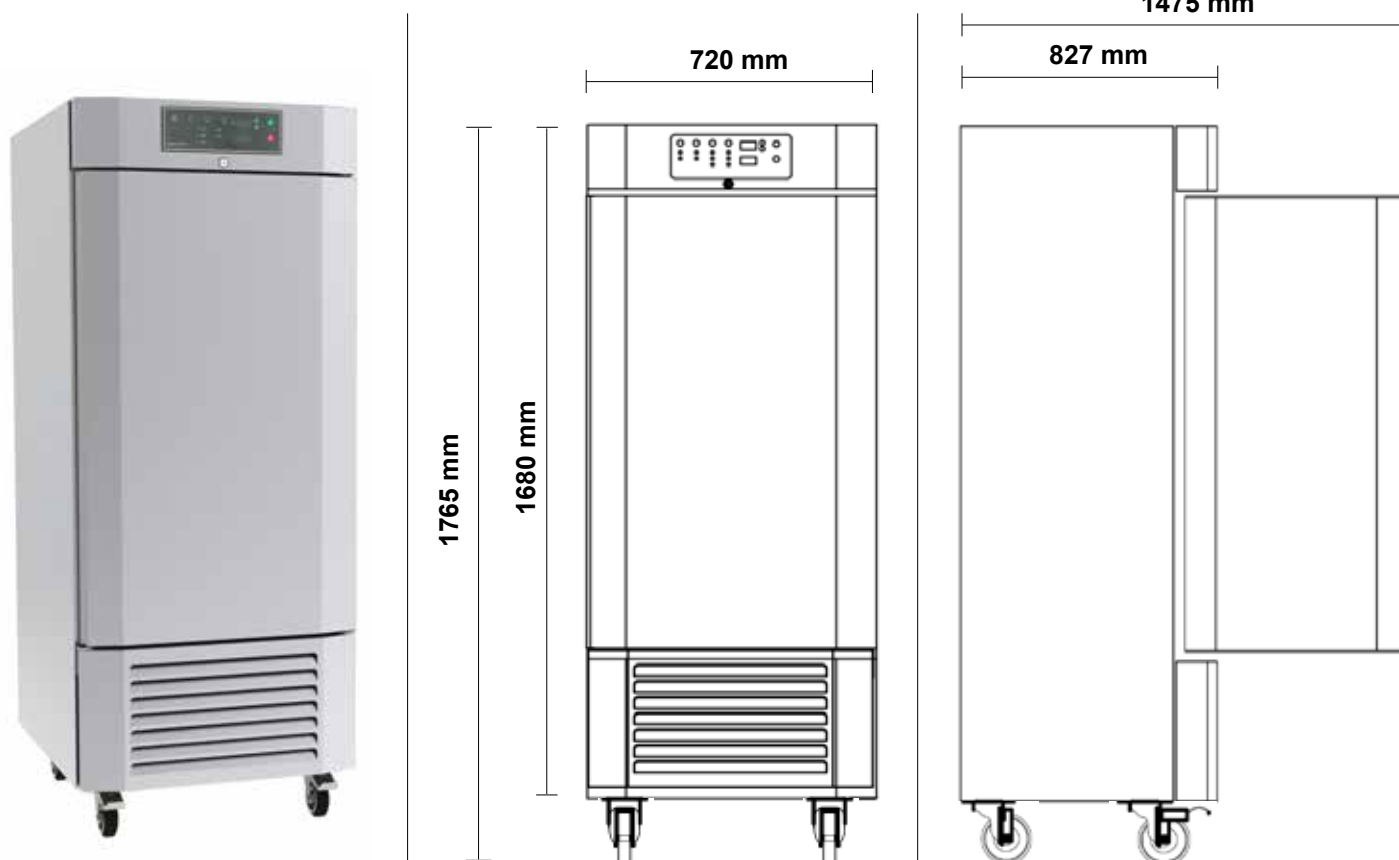

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, bottom mounted, refrigeration unit
Refrigerant	R404a / 1700g
Nominal capacity	2945 Watts @ -5°C/-25°C SST
Chilling/Freezing Capacity	40 kg
Insulation	60mm thick, high density, Zero ODP injected polyurethane insulation
Cabinet temperature range	+90°C to +3°C (90 mins) & +90°C to -18°C (240 mins) up to 43°C ambient
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)
Electrical	240 Volts a.c. 50 Hz, 9.9 / 7.7 Amps
kWh/24hr	N/a
Internal door opening size	1 door opening: Accepts full 1/1 GN pans (325mm wide x 530 deep)
Doors	Stainless steel, self-closing, solid door
Shelves	10 shelves & adjustable tray slides per door
Weight	180kg
Cabinet dimensions	External
	Width 720mm
	Depth 827mm
	Height 1765mm

OPTIONS

Nylon Coated Shelves (GN1/1)
Stainless Steel Shelves (GN1/1)
GN1/1 Pan Set - 40mm Deep
Stainless Steel Back
Adjustable feet/legs (standard on castors)
Left Hand Hung Door
Heli-coil Cable
Hydrocarbon Refrigerant