
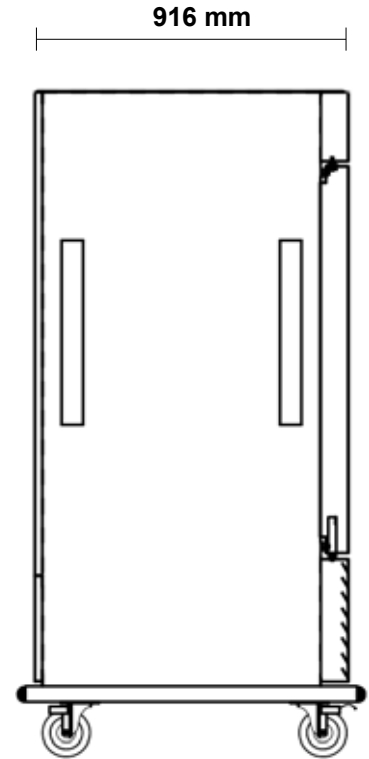


SPECIFICATIONS

PMH30

Mobile Banquet Cart - Hot

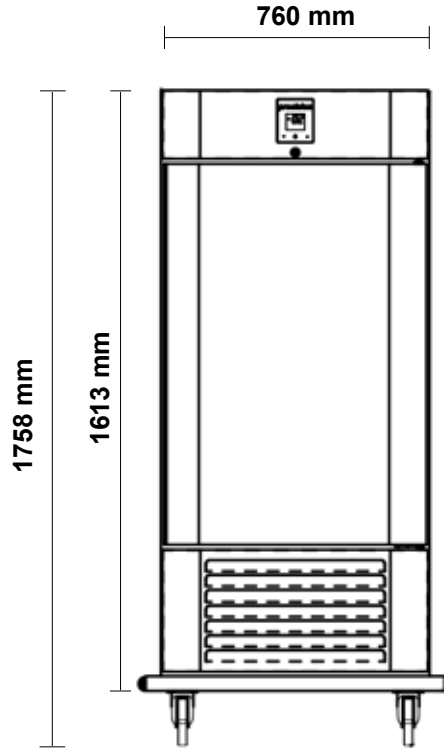

SPECIFICATIONS	
Refrigeration system	Electronic controlled, self-contained, side mounted, refrigeration unit
Refrigerant	N/a
Nominal capacity	N/a
Cabinet internal volume	418 litres
Insulation	60mm thick, high density, Zero ODP injected polyurethane insulation
Cabinet temperature range	+78°C to +82°C up to 42°C ambient
Drainage	N/a
Electrical	220 -240 Volts a.c. 50 Hz, 9.5 Amps
kWh/24hr	N/a
Internal door opening size	1 door opening: Accepts full GN2/1 pans
Doors	Stainless steel, self-closing, solid door
Shelves	15 shelves & adjustable tray slides per door (fits 30 x GN1/1 pans)
Weight	135kg
Cabinet dimensions	External
Width	760mm
Depth	916mm
Height	1758mm

OPTIONS
Nylon Coated Shelves (GN2/1)
Stainless Steel Shelves (GN2/1)
Nylon Coated Shelves (GN1/1)
Stainless Steel Shelves (GN1/1)
Adjustable feet (standard on castors)
Hydrocarbon Refrigerant
HFO Refrigerant
KEY FEATURES
Door locks fitted standard
Ergonomic Flush Door handle
Gastronorm shelving system
Safety Cut Out switch
Heavy duty brake & swivel castors
Flush manoeuvring handles - protective bumper bars