


SPECIFICATIONS

PPC307

3-Door Integral Prep Counter Chiller

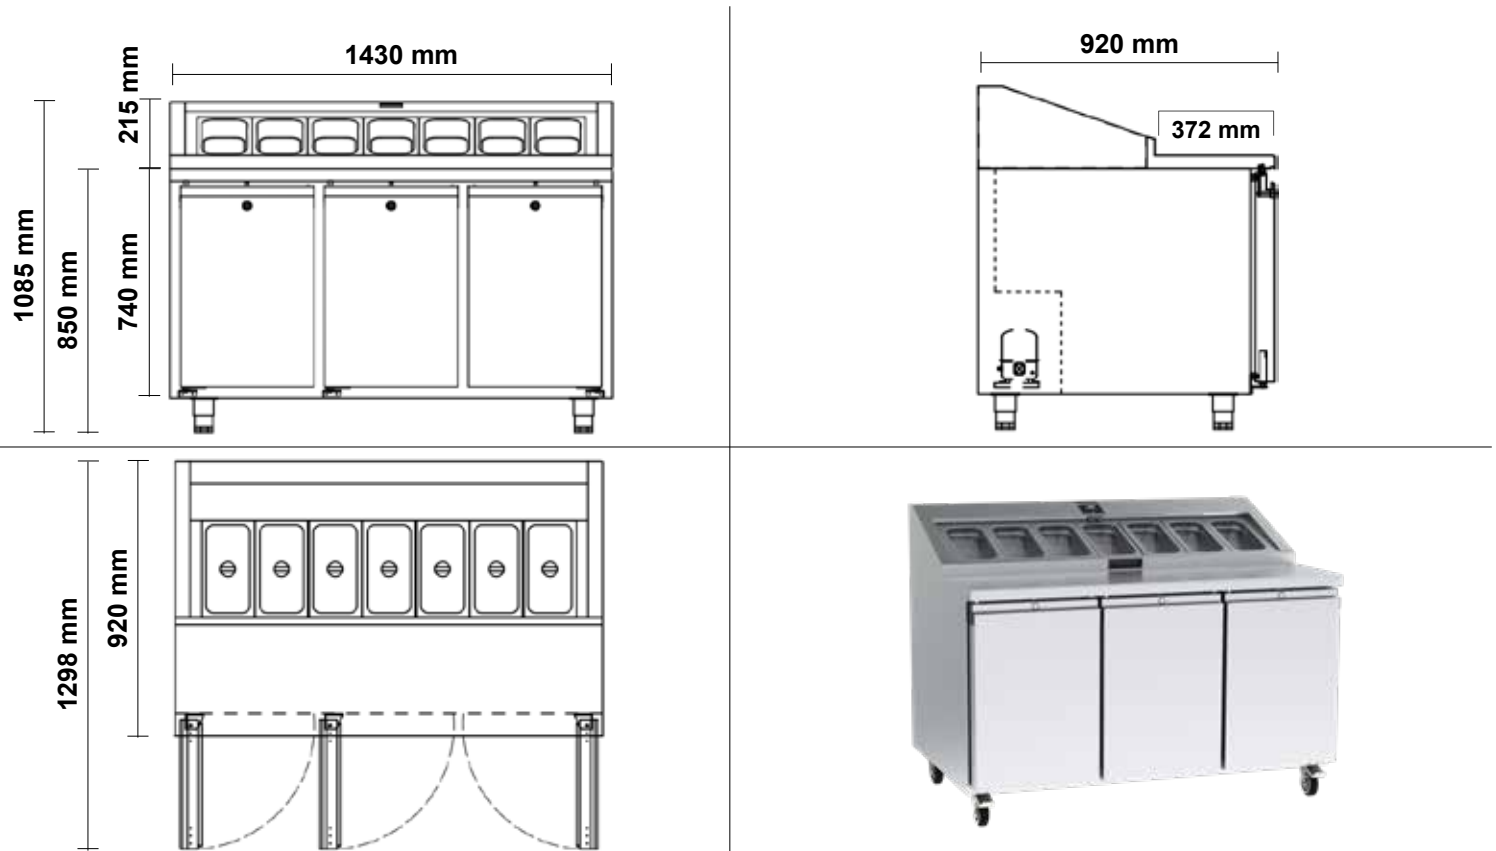

SPECIFICATIONS

Refrigeration system	Electronic controlled, self-contained, rear mounted, refrigeration unit	
Refrigerant	R134a / 300g	
Nominal capacity	530 Watts @ -10°C SST	
Insulation	60mm thick, high density Zero ODP injected polyurethane insulation	
Cabinet temperature range	+1°C to +4°C up to 43°C ambient	
Drainage	Waste heat vaporiser located in service compartment (no plumbing required)	
Electrical	220-240 Volts a.c. 50 Hz, 3.9 Amps	
kWh/24hr	N/a	
Raised Grid	Accepts 7 GN 1/3 pans (150mm deep)	
Internal door opening size	3 door opening, accepts full 1/1 GN pans (325mm wide x 530mm deep)	
Doors	Stainless steel, self-closing, lockable solid door	
Worktop	Integrated stainless steel worktop	
Shelves	2 shelves & adjustable tray slides per door (Total 6)	
Weight	150kg	
Cabinet dimensions	External	Internal
Width	1430mm	1330mm
Depth	920mm	540mm
Height	1085mm	600mm

OPTIONS

Bank of 2 Drawers
Bank of 3 Drawers
Remote Units
Legs (Std on castors)
Extended Worktops
No Worktop
Different Heights
Water-cooled
Extra Shelves
Extra Slides
ST/ST Back
Heli-coil Cable
Hydrocarbon Refrigerant
HFO Refrigerant